


# TX-R/G/B/W3




- Multi-color Power LEDs, various color combination for Stage
- Classic PKG, higher compatibility of Lenses
- Central symmetry of LED chips, high quality of color-mixing
- High heat conductivity materials, lower thermal resistance

RoHS REACH

## 典型参数

颜色 Color	主波长 DWL(nm)	光通量 Lumen(lm)	正向电流 Current(mA)	正向电压 Voltage(V)	热阻 Thermal Resistance (K/W)
红 Red	620-630	110-140	700	2.1-2.7	5.9
绿 Green	520-530	175-235	700	3.1-3.7	11.2
蓝 Blue	455-470	35-55	700	3.1-3.7	11.2
正白 White	6000 -7500K	220-265	700	3.1-3.7	9.5

# TX-RGB3

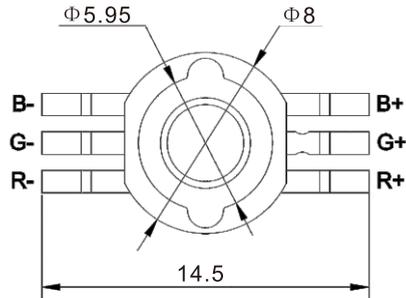


- Multi-color Power LEDs, various color combination for Stage
- Classic PKG, higher compatibility of Lenses
- Central symmetry of LED chips, high quality of color-mixing
- High heat conductivity materials, lower thermal resistance

RoHS REACH

## 典型参数

颜色 Color	主波长 DWL(nm)	光通量 Lumen(lm)	正向电流 Current(mA)	正向电压 Voltage(V)	热阻 Thermal Resistance (K/W)
红 Red	620-630	110-140	700	2.1-2.7	5.5
绿 Green	520-530	180-230	700	3.0-3.6	10.8
蓝 Blue	455-470	30-50	700	3.0-3.6	10.8

# TX-BRWG2

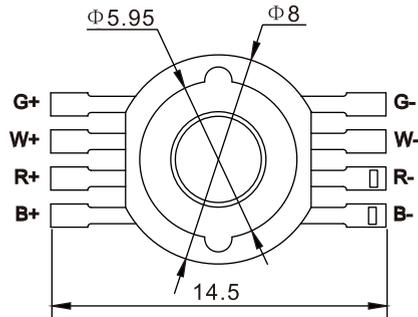


- Multi-color Power LEDs, various color combination for Stage
- Classic PKG, higher compatibility of Lenses
- Central symmetry of LED chips, high quality of color-mixing
- High heat conductivity materials, lower thermal resistance

RoHS REACH

## 典型参数

颜色 Color	主波长 DWL(nm)	光通量 Lumen(lm)	正向电流 Current(mA)	正向电压 Voltage(V)	热阻 Thermal Resistance (K/W)
蓝 Blue	455-470	25-40	500	3.0-3.6	10.6
红 Red	620-630	75-105	500	2.0-2.6	5.9
正白 White	6000 -7500K	130-170	500	3.0-3.6	5.4
绿 Green	520-530	130-160	500	3.0-3.6	10.6

# TX-BGRWY10

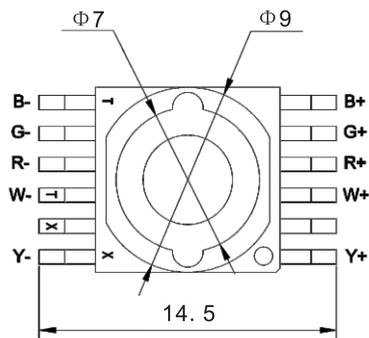


- Multi-color Power LEDs, various color combination for Stage
- Classic PKG, higher compatibility of Lenses
- Central symmetry of LED chips, high quality of color-mixing
- High heat conductivity materials, lower thermal resistance

RoHS REACH

## 典型参数

颜色 Color	主波长 DWL(nm)	光通量 Lumen(lm)	正向电流 Current(mA)	正向电压 Voltage(V)	热阻 Thermal Resistance (K/W)
蓝 Blue	455-470	25-40	500	3.0-3.6	10.2
绿 Green	520-530	135-175	500	3.0-3.6	10.2
红 Red	620-630	75-105	500	2.0-2.6	5.5
正白 White	6000 -7500K	140-180	500	2.9-3.5	4.9
黄 yellow	588-595	70-95	500	2.0-2.6	5

# TX-BGRWPY10

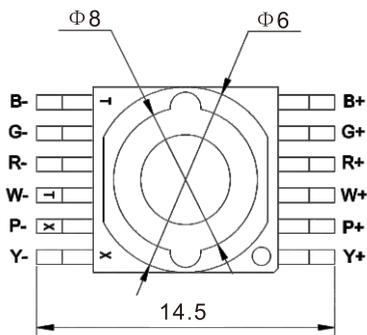


- Multi-color Power LEDs, various color combination for Stage
- Classic PKG, higher compatibility of Lenses
- Central symmetry of LED chips, high quality of color-mixing
- High heat conductivity materials, lower thermal resistance

RoHS REACH

## 典型参数

颜色 Color	主波长 DWL(nm)	光通量 Lumen(lm)	正向电流 Current(mA)	正向电压 Voltage(V)	热阻 Thermal Resistance (K/W)
蓝 Blue	455-470	25-40	400	2.9-3.5	10.2
绿 Green	525-535	115-145	400	2.9-3.5	10.2
红 Red	620-630	60-85	400	2.0-2.6	5.5
正白 White	6000 -7500K	110-145	400	2.9-3.5	4.9
紫 purple	395-405	1.5-2.5	400	3.0-3.6	8.1
黄 yellow	588-595	55-75	400	2.0-2.6	5.0

# TX-RBWG8




- Compact layout of LES, small gap between the chips
- Central symmetry of LED Chips, high quality of color-mixing
- High stability structure
- High heat conductivity materials, lower thermal resistance

RoHS REACH

## 典型参数

颜色 Color	主波长 DWL(nm)	光通量 Lumen(lm)	正向电流 Current(mA)	正向电压 Voltage(V)	热阻 Thermal Resistance (K/W)
红 Red	618-625	80-105	500	2.0-2.6	5.7
蓝 Blue	455-465	25-40	500	3.0-3.6	10.4
正白 White	6000 -7500K	140-180	500	3.0-3.6	3.8
绿 Green	520-530	140-180	500	3.0-3.6	10.4

# TX-RBWG15

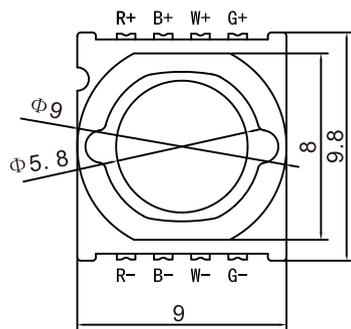

- Compact layout of LES, small gap between the chips
- Central symmetry of LED Chips, high quality of color-mixing
- High stability structure
- High heat conductivity materials, lower thermal resistance

RoHS REACH

## 典型参数

颜色 Color	主波长 DWL(nm)	光通量 Lumen(lm)	正向电流 Current(mA)	正向电压 Voltage(V)	热阻 Thermal Resistance (K/W)
红 Red	620-625	155-195	1000	2.5-3.0	4.8
蓝 Blue	450-460	40-60	1000	3.4-4.0	4.2
正白 White	6000 -7500K	260-320	1000	3.0-3.6	3.8
绿 Green	520-530	240-300	1000	3.0-3.6	4.2