

TX-6065RGBW60FC120-NUVENG-01B

PRODUCT SPECIFICATION

Features:

- ◆ Provide uniform cross distribution of positive white and warm white dual color scheme, mixed pure.
- ◆ High luminous output.
- ◆ No UV.
- ◆ Encapsulated materials are environmentally certified and meet environmental requirements.

Chip Material:

- ◆ Red: AlGaInP
- ◆ Green: GaInN
- ◆ Blue: GaN
- ◆ White: GaN

Emitting Color:


- ◆ Red (R)
- ◆ Green (G)
- ◆ Blue (B)
- ◆ White (W)

Applications:

- ◆ Entertainment lighting
- ◆ Landscape lighting
- ◆ Commercial lighting
- ◆ Decorative lighting

Part No.	TX-6065RGBW60FC120-NUVENG-01B	Spec No.	WKF-FC0147	Page	1 of 11
----------	-------------------------------	----------	------------	------	---------

Package Dimensions:

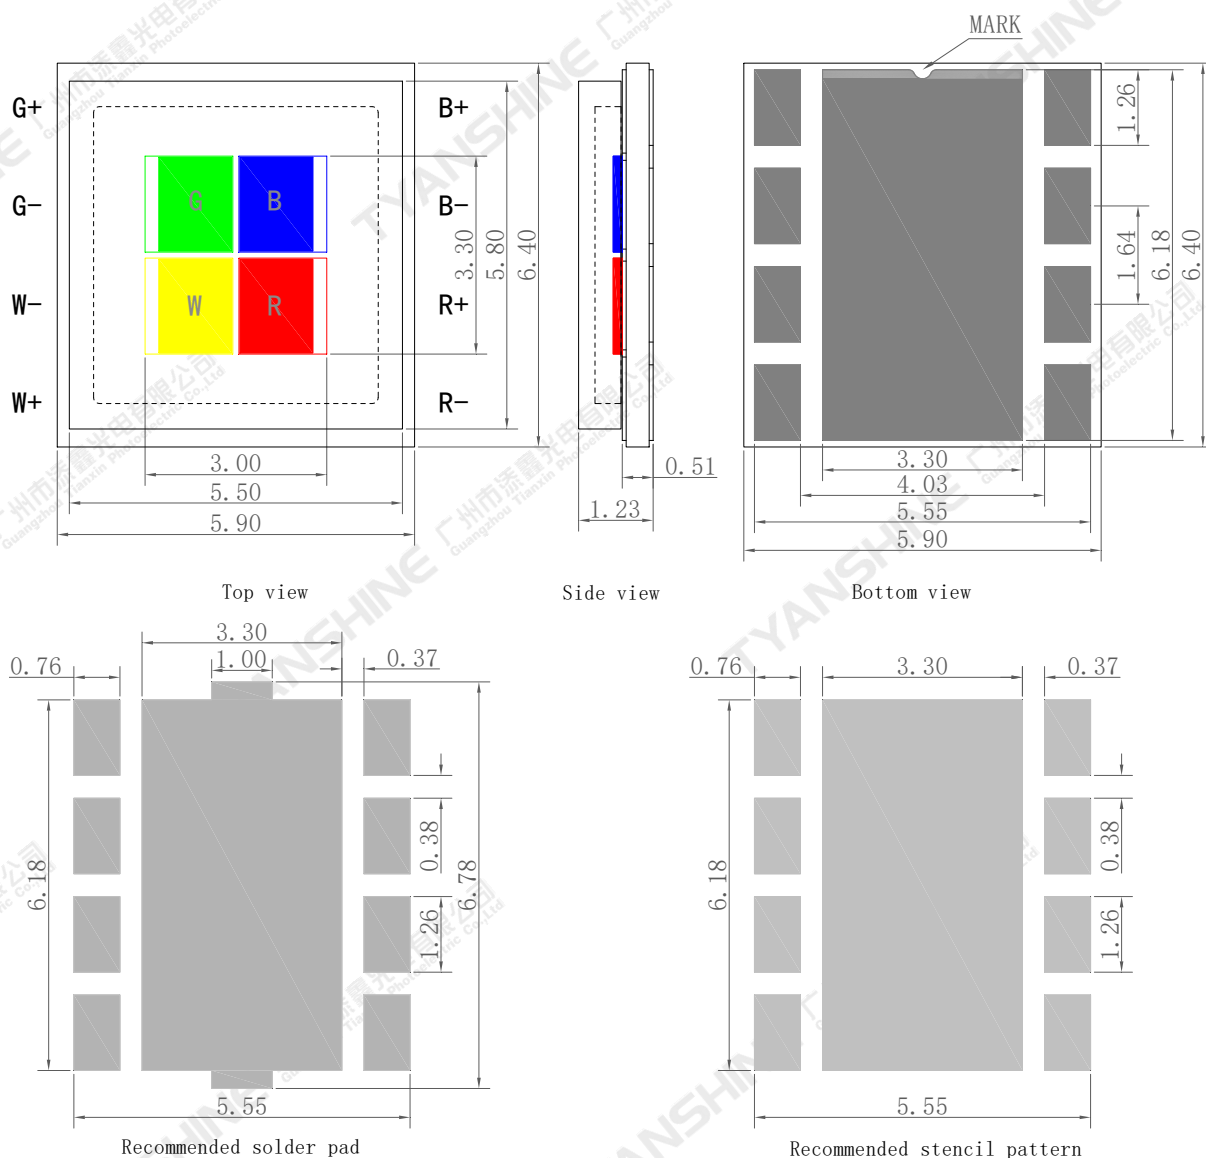

Notes:

- 1.All dimensions are in millimeters .
- 2.Tolerances unless otherwise mentioned are $\pm 0.1\text{mm}$.

Absolute Maximum Ratings (Tc=25℃)

Parameter	Symbol	Ratings	Unit
Forward Current	IF	R	4.5
		G	5.0
		B	6.0
		W	4.5
Reverse Voltage	VR	Not designed for reverse operation	V
Power Dissipation	PD	R	12
		G	17
		B	20
		W	15
Junction Temperature	Tj	R	125
		G	150
		B	150
		W	150
Electrostatic Discharge Threshold (ESD)	ESD	2000	V
Storage Temperature(Only for LED, not including packaging)	Tstg	-40~+85	℃
Operation Temperature	Topr	-40~+85	

Notes:

- Specifications are subject to change without notice.
- The data on this specification is for reference only and the actual data is in accordance with the acknowledgment.
- Precautions for ESD:
STATIC SHIELD Electricity and surge damages the LED. It is recommended to use a wrist band or anti-electrostatic glove when handling the LED. All devices, equipment and machinery must be properly grounded.

Part No.	TX-6065RGBW60FC120-NUVENG-01B	Spec No.	WKF-FC0147	Page	3 of 11
----------	-------------------------------	----------	------------	------	---------

Electrical Optical Characteristics (Tc=25°C)

Parameter	Symbol	Condition	Emitting Color	Min.	Typ.	Max.	Units
Luminous Flux	Φ_v	If=1.0A	R	105	125	145	lm
			G	305	360	395	
			B	45	50	55	
			W	350	410	450	
		If=4.0A	R	350	410	450	
			G	700	850	950	
			B	120	135	150	
			W	1000	1200	1350	
Forward Voltage	V_f	If=1.0A	R	2.2	2.5	2.8	V
			G	3.0	3.3	3.6	
			B	3.0	3.3	3.6	
			W	3.0	3.3	3.6	
		If=4.0A	R	2.2	2.6	3.0	
			G	3.0	3.4	3.8	
			B	3.0	3.4	3.8	
			W	3.0	3.4	3.8	
Dominant Wavelength	λ_d	If=1.0A	R	618	623	628	nm
			G	522	527	532	
			B	448	453	458	
		If=4.0A	R	620	625	630	
			G	517	522	527	
			B	446	451	456	
Peak-emission Wavelength	λ_p	If=1.0A	R	627	632	637	nm
			G	515	520	525	
			B	443	448	453	
		If=4.0A	R	631	636	641	
			G	512	517	522	
			B	441	446	451	
Spectral Line Half-Width	$\Delta\lambda$	If=1.0A	R	11	16	21	nm
			G	23	28	33	
			B	12	17	22	
			W	12	17	22	
		If=4.0A	R	13	18	23	
			G	26	31	36	
			B	16	21	26	
			W	16	21	26	


Correlated Colour Temperature	CCT	If=1.0A	W	5700	—	6600	K
Reverse Current	I _R	—	—	—	—	2	μA
Viewing Angle at 50 % IV	2θ _{1/2}	—	—	—	120	—	Deg
Thermal Resistance Junction to Case	Rθ _{J-C}	—	—	—	0.35	—	K/W
Temperature Coefficient of Voltage	VΔF/T	If=1.0A	R	—	-6.01	—	mV/°C
			G	—	-1.85	—	
			B	—	-13.45	—	
			W	—	-9.8	—	
		If=4.0A	R	—	-6.66	—	
			G	—	-8.9	—	
			B	—	-13.6	—	
			W	—	-14.6	—	

Notes:

- 1.Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
- 2.θ_{1/2} is the off-axis angle at which the luminous intensity is half the axial luminous intensity.
- 3.Luminous flux measurement tolerance:±15%.
- 4.Forward voltage measurement tolerance:±0.15V.

Part No.	TX-6065RGBW60FC120-NUVENG-01B	Spec No.	WKF-FC0147	Page	5 of 11
----------	-------------------------------	----------	------------	------	---------





White Color coordinate filing (IF=1.0A Tc=25℃)

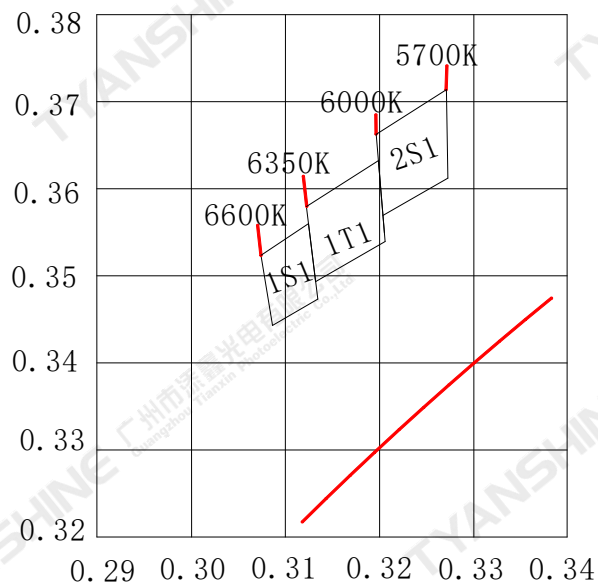



Region	CCT Range		X1	Y1	X2	Y2	X3	Y3	X4	Y4
	Min	Max								
2S1	5700	6000	0.3272	0.3612	0.3271	0.3714	0.3196	0.3663	0.3204	0.3569
1T1	6000	6350	0.3206	0.3539	0.3199	0.3632	0.3122	0.358	0.3132	0.3493
1S1	6350	6600	0.3134	0.3473	0.3125	0.356	0.3074	0.3524	0.3086	0.3443

Typical Electrical/Optical Characteristics Curves

(25°C Ambient Temperature Unless Otherwise Noted)

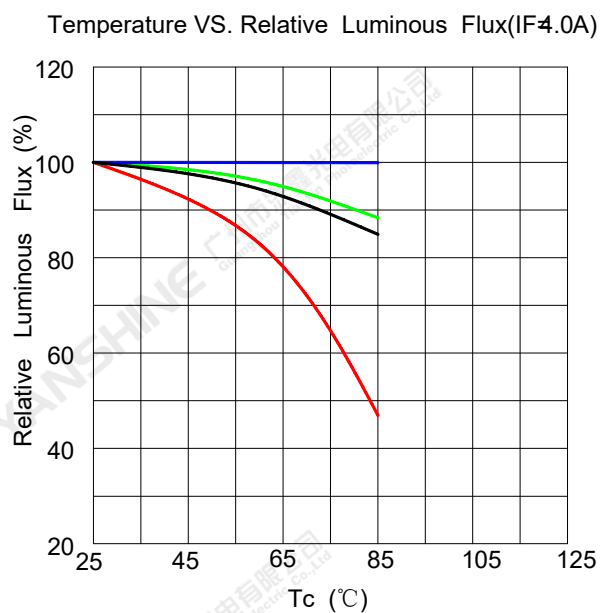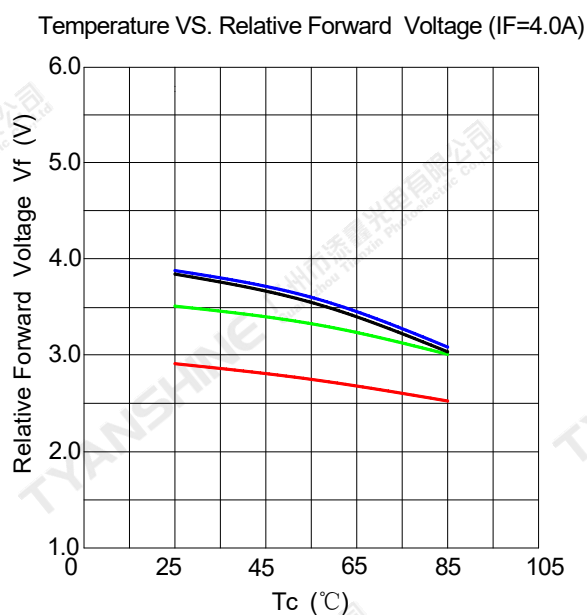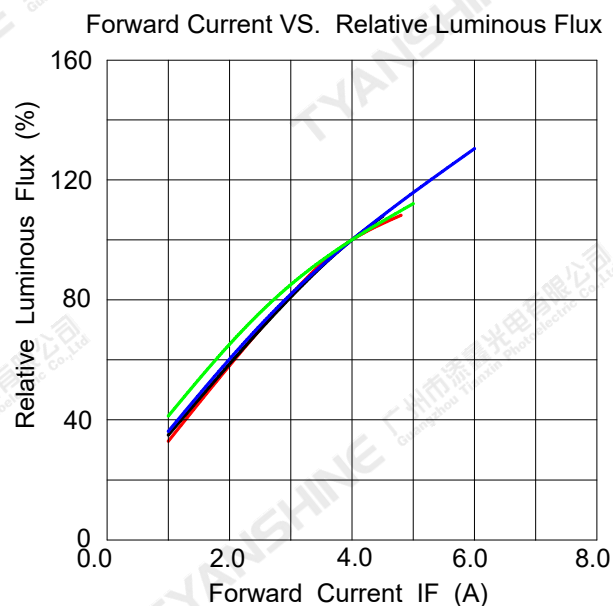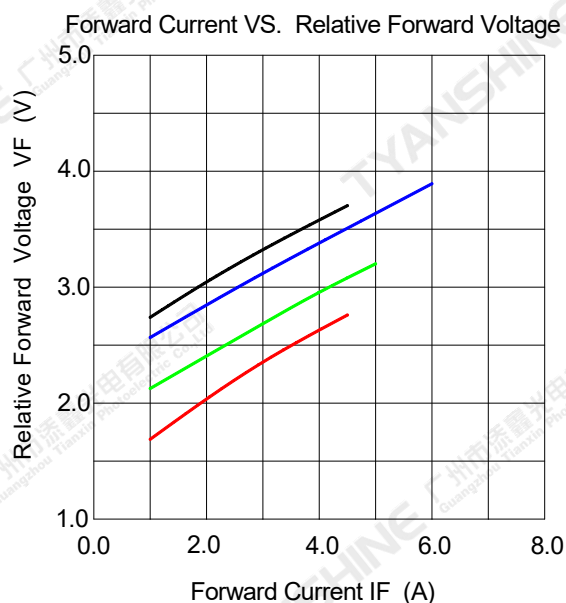

Notes: Red; Green; Blue; White;

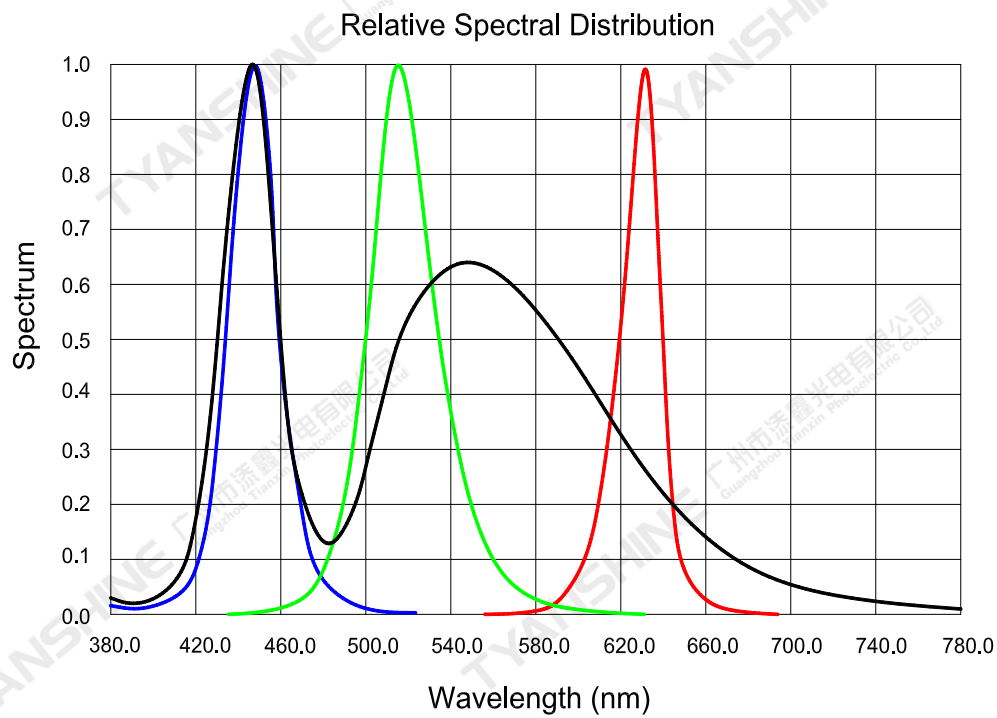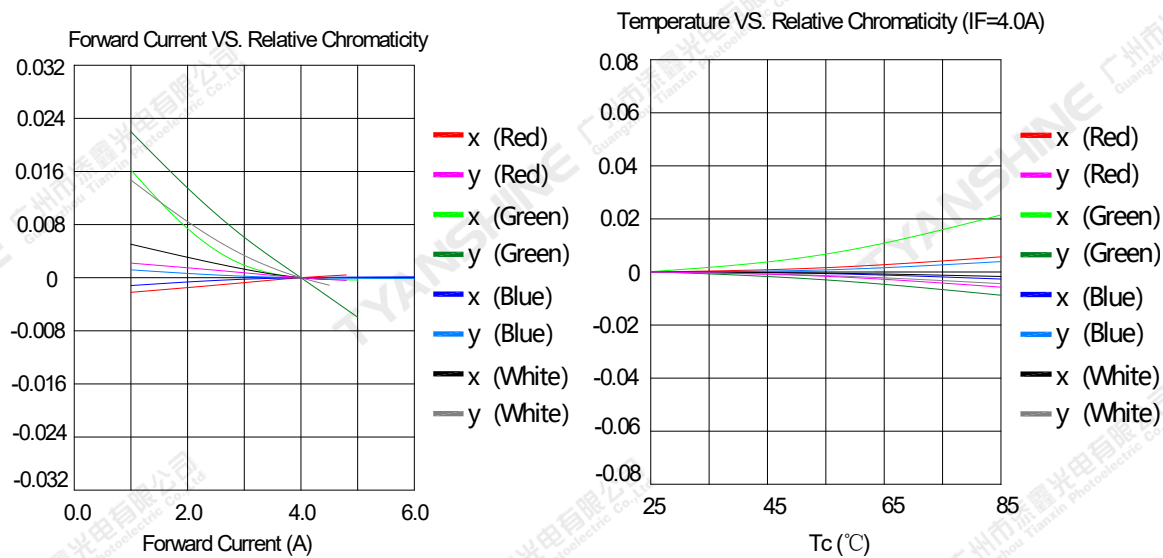

Notes: — Red; — Green; — Blue; — White;

Notes:

- 1. 2θ 1/2 is the off axis angle from lamp centerline where the luminous intensity is 1/2 of the peak value.
- 2. View angle tolerance is ± 5°.


Usage Precautions

Storage Environment Condition

Temperature: 5°C ~ 30°C (41°F ~ 86°F)

Humidity: 60% RH Max.

Soldering Condition

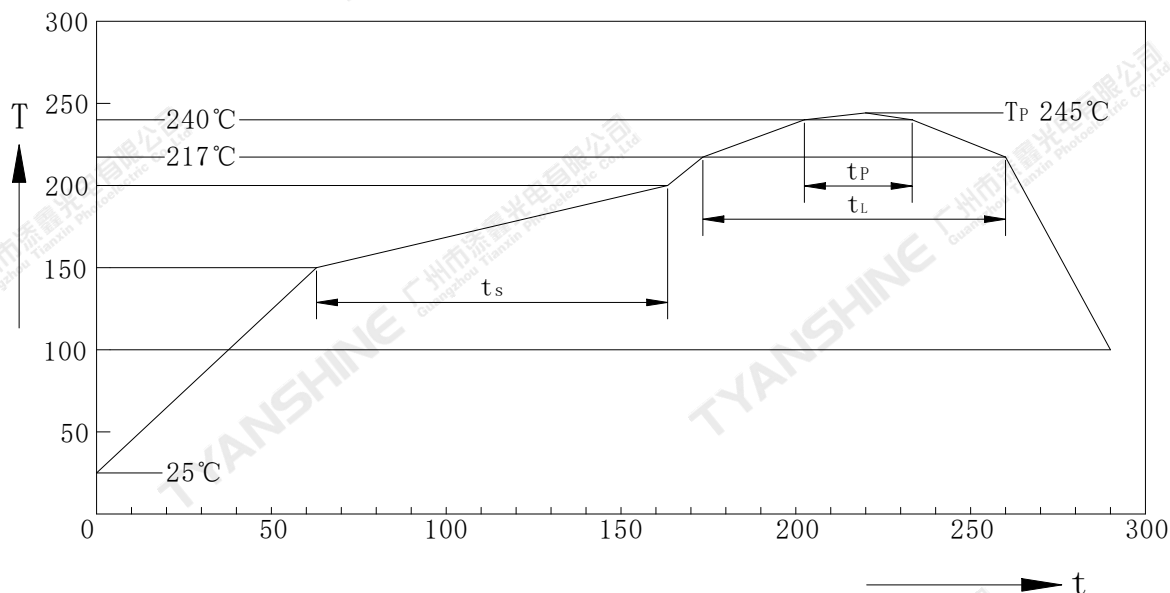


Profil-Charakteristik Profile Feature	Symbol	Pb-Free(SnAgCu)Assembly			Einheit Unit
		Minimum	Recommendation	Maximum	
Ramp-up Rate to Preheat 25°C to 150°C	-	-	2	3	K/s
Time t_s T_{Smin} to T_{Smax}	t_s	60	100	120	s
Ramp-up Rate to Peak T_{Smax} to T_p	-	-	2	3	K/s
Liquidus Temperature	T_L	217			°C
Time above Liquidus temperature	t_L	-	80	100	s
Peak Temperature	T_P	-	245	255	°C
Time within 5°C of the specified peak temperature $T_p \pm 5$ K	t_P	10	20	30	s
Ramp-down Rate T_p to 100°C	-	-	3	6	K/s
Time 25°C to T_p	-	-	-	480	-

Note:

All temperatures refer to topside of the package, measured on the package body surface.

Dimensions For Cannulation And Packaging

Quantity:1000PCS

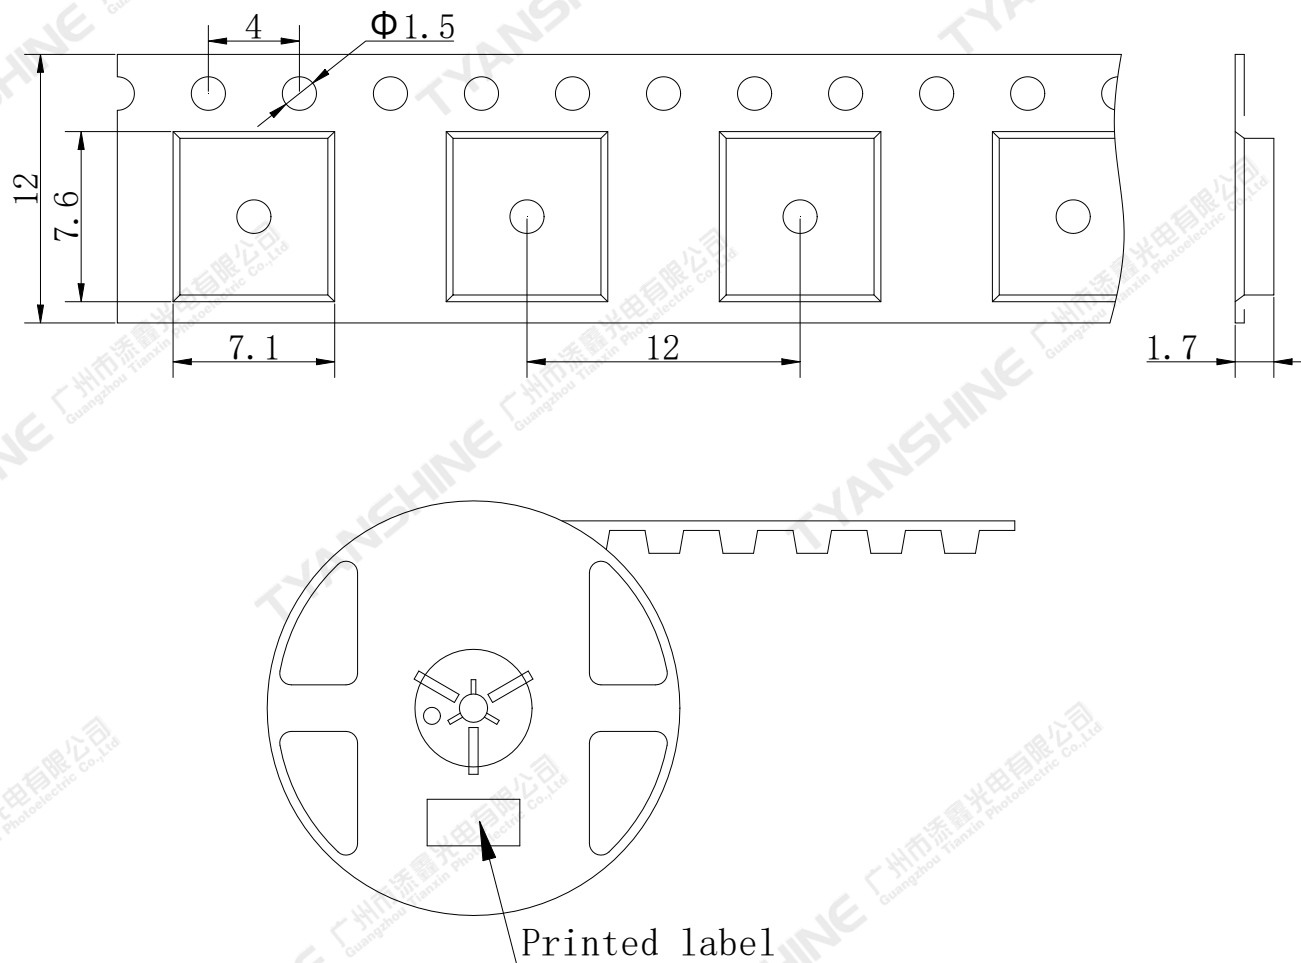**Notes:**

1. All dimensions are in millimeters.
2. Tolerances are ± 2.0 mm unless otherwise noted.
3. The products are packaged together with silica gel, Transport, not to the weight of welding LED light-emitting area, As a result of the weight of LED light-emitting zone in the quality of, Irresponsible of the Company.

Part No.	TX-6065RGBW60FC120-NUVENG-01B	Spec No.	WKF-FC0147	Page	10 of 11
----------	-------------------------------	----------	------------	------	----------

产品规格书变更履历表

[illegible]